

## INSTRUCTIONS

### 360-DEGREE SECURITY IP CAMERA

#### COMPONENTS

- Light bulb camera
- Lightbulb socket
- Screws and inserts

#### TECHNICAL SPECIFICATIONS

- Ambient bulb with integrated LEDs
- Classic thread E27
- Voltage: 100 - 240 V (50 - 60 Hz)
- Wireless protocol: 802.11 b / g / n, 2.4Ghz WiFi




#### INSTALLATION

- Turn off the fuse before installing the lamp!
- Insert the bulb into the classic E27 and tighten until the bulb is firmly attached.
- Turn on the safety fuse and turn on the switch.



#### CONNECTION AND USE

After the bulb is installed, enable the power (switch) and press the RESET button with the needle. In the meantime, you can download the iCSee application (Google Play, Apple Store) on your smartphone.

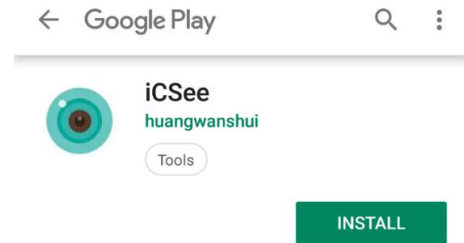


At first use, the iCSee application will require permission to use the camera, access to images and location. For optimal use, allow the camera to access the listed options of your smart device.

In the next step, set the permissions in the settings of your smart device. Press SET.

In the settings, locate the PERMISSIONS and in the next step, OTHER PERMISSIONS / OTHER LICENSES.

For optimal use, select the settings shown in the picture below.

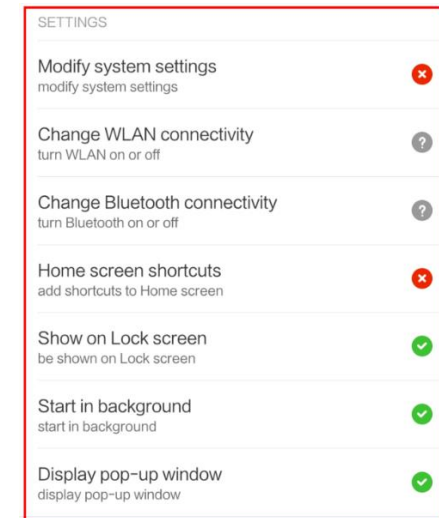


After you have set permissions, sign in to the application.

You can access the camera as a guest (LOCAL LOGIN) or as a registered user (ACCOUNT LOGIN).

We advise you to use the latter method.

To use the latter mode, register by tapping the SIGN UP option.

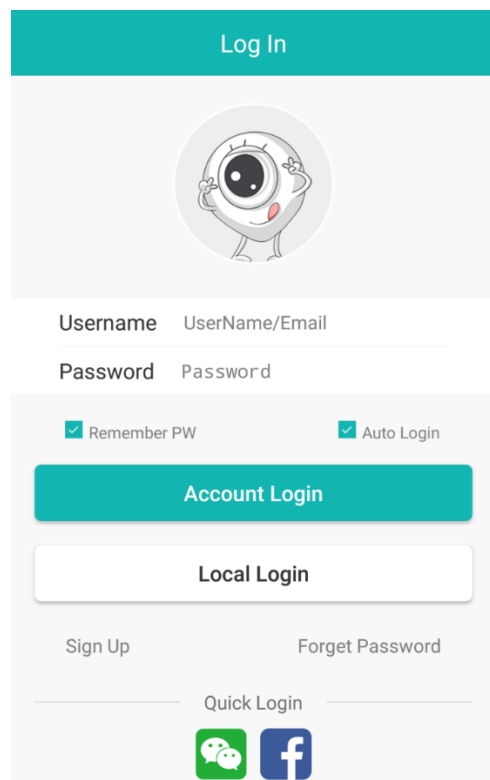


Insert your username, password, repetition of the password, and e-mail. The application will send you a 4-digit number in your e-mailbox, which you then

enter into the application to confirm the registration.

### ADDING YOUR DEVICE IN THE APP

After successfully signing in, click + in the top right corner and tap SET MY DEVICE TO WI-FI. Make sure your WiFi transmitter transmits a 2.4 GHz signal.

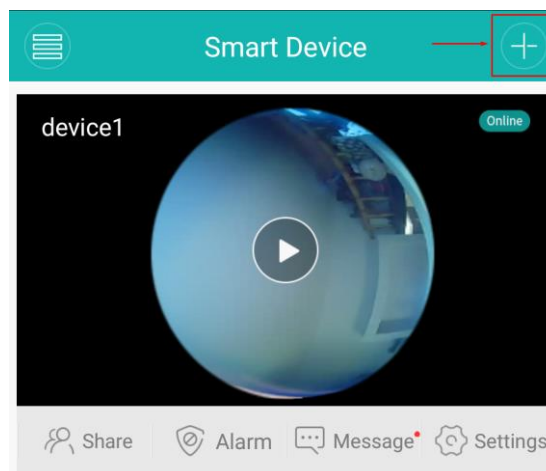

Follow the steps and allow the app to access the location of the device.

Select your home wireless network and enter your password. The app will start searching for devices that broadcast WiFi devices in the vicinity - so it's crucial that when you add cameras to the app you are in the vicinity.


You can use multiple cameras in the app at the same time, each setting a view mode, rotating, zooming in and out of the view, and plenty of other

options. The camera also contains a motion sensor and will alert you to your smart device every time it detects the movement (if you have enabled it in the procedure described in the previous section).



You need a MicroSD / TF card (not enclosed) for storing images. For more information about using the application, contact the app developer.

A 360 degree IP camera also allows you to speak - press and hold down the middle key and the camera will play your speech.

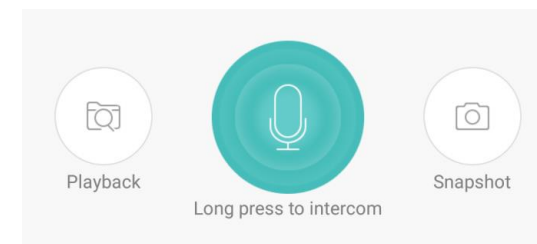


## IMPORTANT

- The camera must always have power enabled for use (switch)
- You need a MicroSD / TF card for storing images (FAT32 format, up to 128 GB maximum, not enclosed)
- Check regularly for iCSee app updates
- Regularly update the password for accessing the user account and camera
- Do not set easy passwords to avoid invasion of your privacy
- You can only use the camera in accordance with laws and legal acts
- When installing or replacing, always disable the electrical voltage in the socket (turn off the switch and fuse)
- Install out of the reach of children
- If the device is turned on for a long time, do not touch the bulb to avoid burns
- Do not use this product near water or inflammable substances, with wet hands or body or in contact with water
- Clean the device with a dry cloth
- Do not use abrasive products for cleaning
- Do not immerse in liquid
- If you do not use the device for a long time, remove the battery
- Store in a dry, dust-free place
- Please comply with the Waste disposal and Environmental Regulations

## WARRANTY

The warranty is valid for 24 months. You can claim it from DFVU d.o.o., Liparjeva 6a, 1234 Mengeš, Slovenia, for a replacement product or a refund. Send us your order number and purchase date in the email, which is available by clicking on our logo in the bottom right corner. The product has a lifetime of 24 months from the date of collection.



	<p>WEEE disposal and recycling symbol.</p> <p>The WEEE symbol is attached to the product in compliance with the EU directive <i>2012/19/EU</i> on Waste Electrical and Electronic Equipment (WEEE). It is intended to deter the improper disposal of this product and to promote reuse and recycling.</p>
---	---