

## INSTRUCTIONS

### PROFESSIONAL ENDOSCOPE CAMERA QUICKPEEK

#### PACKAGE CONTENTS

- Endoscope camera with LCD screen
- Micro USB charging cable
- 3 camera attachments (a hook, a mirror, and a magnet)
- User's guide

#### TECHNICAL SPECIFICATIONS

- Max video resolution: 1920 × 1080 pixels
- Focal length: 5–500 cm
- 3 LED brightness levels
- IP67 waterproof
- Battery: built-in 2600 mAh
- Camera cable length: 2, 5, or 10 m
- LCD screen diagonal: 11 cm
- Camera diameter: 8 mm
- Dimensions: 148 × 85 × 17 mm



#### FEATURES




- (1) Menu/Back
- (2) Up/Decrease light
- (3) OK/Power button
- (4) Down/Increase light
- (5) Picture/Video
- (6) Micro USB plug
- (7) TF card slot

**Note:** This device supports Micro TF cards with a space capacity of up to 128 Gb. It only supports TF cards with class 10 or higher in FAT32 format. TF cards that are not in FAT32 format will be automatically formatted into FAT32 after being inserted into the device.

#### HOW TO USE

- Insert the Micro TF card (not included) into the card slot (7). Press gently until the card is locked in place. (TF card is used to store pictures and videos.) You don't need a TF card if you are only using the device for inspecting.
- Long-press the OK/Power button (3) to turn on the device. The camera's LED light will turn on.
- Use the light buttons (2 and 4) to decrease or increase the LED light's brightness.
- If you want to take a picture, short-press the Picture/Video button (5), and if you're going to record a video, long-press the Picture/Video button (5). To stop recording, press the button again.
- To enter the menu page, press the Menu/Back button (1). To navigate through the menu, use the up and down buttons (2 and 4).
- In the menu interface, select "Photo" or "Video" to look at the recorded pictures or videos.
- In the menu interface, you can also change the recording resolution, change the language, adjust the brightness, change the screen rotation, add a timestamp, adjust time and date, format the TF card, reset all settings, and check your storage as well as software version.
- To turn off the device, long-press the OK/Power button (3).

- Use the included micro USB cable to charge the device. When the battery is full, the red indicator light will go out. Unplug the charging cable.
- The package includes three camera attachments. All three attachments clip onto the camera the same way. Simply place the attachment onto the camera and clasp the plastic part, so that it locks in place.

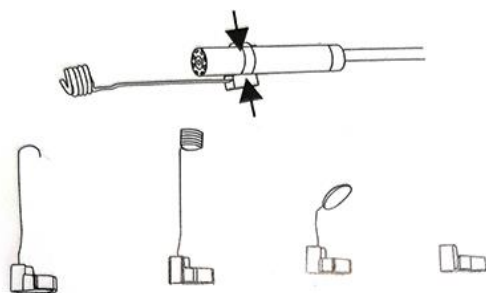

## WARNINGS

- The camera probe is made from materials which are not resistant to high temperature. When checking a vehicle's engine, please wait until the engine cools down before probing.
- Do not violently hit the camera probe, and do not imprudently pull the cable.
- Keep away from children and pets.
- Do not disassemble or modify in any way.
- Only use the included USB charging cable.
- Only use the product for its intended purpose.

## WARRANTY

The warranty is valid for 24 months. You can claim it from DFVU d.o.o., Liparjeva 6a, 1234 Mengeš, Slovenia, for a replacement product or a refund. Send us your order number and purchase date in the email, which is available by clicking on our logo in the bottom right corner. The product has a lifetime of 24 months from the date of collection.



	<p>WEEE disposal and recycling symbol. The WEEE symbol is attached to the product in compliance with the EU directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). It is intended to deter the improper disposal of this product and to promote reuse and recycling.</p>
--	---