

INSTRUCTIONS

DR DENT CAR DENT REPAIR KIT

PACKAGE CONTENTS


- Repair tool
- 28 attachments
- Glue gun
- 5 glue sticks
- Rag
- Chisel
- Spray bottle

TECHNICAL SPECIFICATIONS

- Tool size: 12 × 33.5 cm
- Rated voltage: 220–240 V AC 50/60 Hz
- Rated power: 20 W
- Material: steel, plastic



COMPONENTS

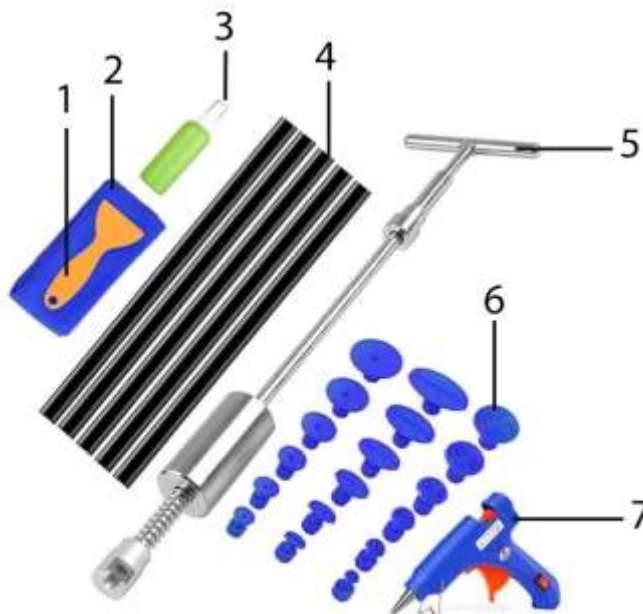

- (1) Chisel
- (2) Rag
- (3) Spray bottle
- (4) Glue sticks
- (5) Repair tool
- (6) Attachments
- (7) Glue gun

REPAIR TOOL ASSEMBLY

- Before you start repairing dents on your car, you have to assemble the repair tool.
- There are two configurations of the tool. One that utilizes the impact hammer for additional force when repairing larger or

more difficult dents, and a shorter one for quick and easy repairs.

- Follow the image below to assemble the tool **with the impact hammer**.



- To assemble the tool in the **short configuration** only connect the handle and the attachment notch on the bottom.

USING THE GLUE GUN

- Insert one of the included glue sticks into the hole in the back of the glue gun and push it all the way to the front until it stops.
- Unfold the metal stand and put the glue gun on a flat surface.

- Connect the power cable to an electrical socket and turn on the glue gun by using the ON/OFF switch on the side of the handle.
- Wait at least two minutes for the glue gun to warm up.
- Squeeze the trigger to make the glue come out of the nozzle of the gun.

REPAIRING CAR DENTS

- Locate the dent and decide which attachment to use to repair it. This depends on the size and the depth of the dent. Use small attachments for small dents and large attachments for bigger dents.
- If you followed the steps above, you should have the repair tool and glue gun ready.
- Use the spray bottle (use water or a mild cleaning solution) and rag to clean the dent.
- Apply a generous amount of glue onto the chosen attachment and press the attachment into the center of the dent.
- Wait a few minutes for the glue to set.
- Connect the bottom part of the repair tool with the attachment in the dent.
- Pull as hard as you can, or use the impact hammer on the tool to flatten the dent.
- Repeat until you achieve expected results.
- Remove the glue and attachment from the car with the included chisel.

WARNINGS

- Only intended for round shallow dents made by pressure. Repairing sharp dents and creases should be avoided and left to professionals.

- Do not leave the glue gun unattended when connected to power.
- Always turn off and disconnect the glue gun from power when not in use.
- Let the glue gun cool down after use.
- We are not responsible for damage you cause to your car due to improper use of the product.
- We recommend consulting a professional before repairing the dents by yourself.

WARRANTY

The warranty is valid for 24 months. You can claim it from DFVU d.o.o., Liparjeva 6a, 1234 Mengeš, Slovenia, for a replacement product or a refund. Send us your order number and purchase date in the email, which is available by clicking on our logo in the bottom right corner. The product has a lifetime of 24 months from the date of collection.



WEEE disposal and recycling symbol. The WEEE symbol is attached to the product in compliance with the EU directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). It is intended to deter the improper disposal of this product and to promote reuse and recycling.