

INSTRUCTIONS

MULTIFUNCTIONAL LAMP G-LAMP

PACKAGE CONTENTS


- Multifunctional lamp
- USB charging cable

TECHNICAL SPECIFICATIONS

- Size: 22,5 × 8,2 × 23 cm
- Material: ABS, PC
- Input voltage: 12 V/2,5 A
- Wireless output: 5 W/7,5 W/10 W/15 W
- LED light output: 10 W
- Bluetooth speaker: 3 W
- Working frequency: 100–205 kHz



COMPONENTS

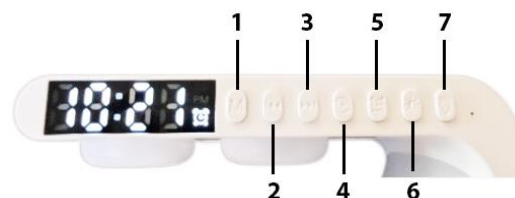

1. Clock and Bluetooth mode
2. Volume down/previous track/hours
3. Volume up/next track/minutes
4. Clock setting
5. Alarm setting/LED display ON/OFF
6. Brightness adjustment
7. Light mode/light ON/OFF

CHARGING

- Only use a fast charging adapter (12 V/2,5 A). Adapter is not included in the package.
- Weaker adapters (e.g. 5 V/1–2 A) result in insufficient power supply.
- Connect one end of the included USB charging cable to the charging port on the device. Connect the other end to a fast charging adapter.

CONNECTING THE DEVICE VIA APP

- Before use, download the HappyLighting app from the Google Play store or Apple App store.
- Enable Bluetooth on your phone.

- Open the app and click the menu symbol in the upper left corner.
- Click on “My Device” and choose “Dream~ + product serial number” to connect your device.




Scan the QR code to download the app from Google Play.

USING THE APP

- **Main interface:** light ON/OFF, choose light color from a photo, adjust light color, adjust brightness, preset colors, standard colors.
- **Music:** play music and change RGB colors based on the music rhythm.
- **Tape:** change RGB colors based on the rhythm of your voice via phone or device microphone. Adjust microphone sensitivity.
- **Style:** Select one of the 256 modes and adjust the speed of changing colors and their brightness. You can also choose pre-set options or select a color scheme according to one of the 10 scenes.
- **Timing:** Set and turn alarms on/off.

- **Settings:** Change app background, enable the “Shake” option (change colors by shaking your phone).
- **Wake-up light:** Click the “Timing” tab and select your device. Click the time below and set the desired hour and minutes. Choose days of the week and turn on the “Operate” and “Enable” options. At the set time, the lamp will simulate the sunrise and brightness will gradually increase within 3 minutes (0–100 %). After 3 minutes, you can turn off the wake-up light via the app or by long pressing the (7) button.

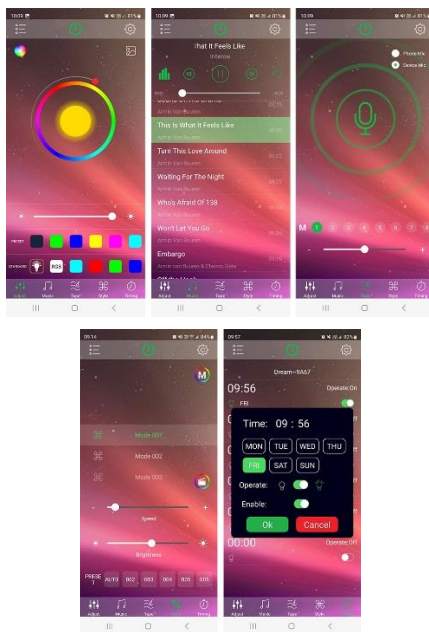

USING THE DEVICE

- **Clock setting:** Double press the (1) button to enter clock mode. Press the (4) button to set the time. Use the (2) button for hours and (3) button for minutes. After setting the time, wait 5 seconds to save the time. Long press the (4) button to switch between 12/24 hour mode.
- **Alarm setting:** Double press the (1) button to enter clock mode. Press the (5) button to set the alarm. Use the (2) button for hours and (3) button for minutes. After setting the alarm, wait 5 seconds to save the setting. The alarm clock symbol appears on the display.
- Alarm automatically turns off after 5 minutes. To manually turn off the current alarm, press the (1) button. To completely turn off the alarm function, double press the (1) button to enter clock mode, then double press the (5) button. The alarm clock symbol disappears from the display.
- Long press the (5) button for 2 seconds to turn the LED display on/off.
- **Light mode:** Press the (7) button to turn on the light. By pressing this button, you can switch between 10 lighting modes. For other modes, use the phone app.
- Long press the (7) button to turn the lights off.


- **Brightness:** Press the (6) button to adjust the brightness from 20 to 100% (in 5 steps).
- **Bluetooth speaker:** Press the (2) button to play the previous track. Long press to turn the volume down. Press the (3) button to play the next track. Long press to turn the volume up. Press the (1) button to pause/play the track.
- You can also answer phone calls – press the (1) button when your phone rings.
- **Wireless charging:** Place your phone in the center of the wireless charging area. The transmission distance is 2–6 mm. Please do not use phone cases thicker than 2 mm.

WARNINGS

- **Only use the 12 V/2,5 A adapter for charging!**
- Always place the device on a flat surface.
- Do not expose to moisture or extreme heat.
- Do not subject to extreme force or shock.
- Do not disassemble or modify in any way.
- When wireless charging your phone, make sure there are no metal or magnetic objects within the diameter of 6 cm from the center of your phone.
- Charging speed is higher at lower temperatures.
- Clean the product with a slightly damp cloth.

WARRANTY

The warranty is valid for 24 months. You can claim it from DFVU d.o.o., Liparjeva 6a, 1234 Mengeš, Slovenia, for a replacement product or a refund. Send us your order number and purchase date in the email, which is available by clicking on our logo in the bottom right corner. The product has a lifetime of 24 months from the date of collection.



WEEE disposal and recycling symbol. The WEEE symbol is attached to the product in compliance with the EU directive *2012/19/EU* on Waste Electrical and Electronic Equipment (WEEE). It is intended to deter the improper disposal of this product and to promote reuse and recycling.